


FEATURES:

- Input: AC 100-240V~ 50/60Hz
- Available plug: C8 inlet
- Port: 4xTYPE C port
- Ovp, Ocp, Scp and Over load protection
- GAN TECH, 200W PD Charger, smart
- Efficiency level: VI
- Dimension: 100.0*72.0*32.0mm(exclude plug)
- Protocol: TypeC PD2.0/PD3.0/PD3.1/PPS, QC4/QC4+/QC3.0/QC2.0 , FCP, SCP, AFC, Apple2.4 , BC1.2, MTK

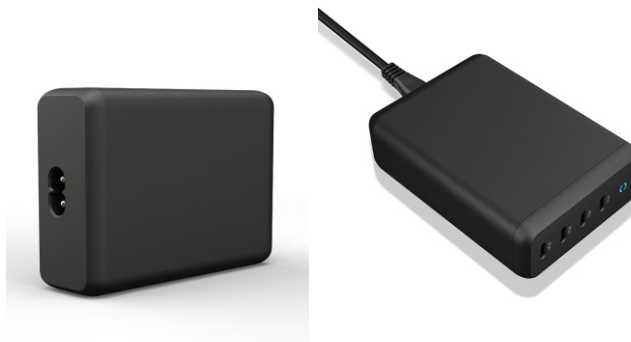

SAFETY:

SAFETY:	
Safety Standard	UL 62368, IEC 62368, EN 61558, IEC60601, IEC60335, IEC60065
Safety Approval	UL/cUL, CE, FCC, UKCA, PSE, CB, SAA, KC, TUV
EMC Standard	EMC EMISSION: EN55032 class B (CISPR32), EN61000-3-2,-3, EAC TP TC 020 EMC IMMUNITY: EN61000-4-2,3,4,5,6,8,11, EN55024; light industry level, criteria A, EAC TP TC 020
MTBF	50K hrs min. MIL-HDBK-217F (25°C)

MODEL LIST:

MODEL	USB PORT	OUTPUT	Single Port POWER	TOTAL POWER
MU4200D-GaN 4C	USB C PORT 1	PD: 5V3A,9V3A,12V3A, 15V3A, 20V5A(PPS:3.3-20V 5A)	100W	PD1+PD2/PD3/PD4: Output: 100W+100W Total: 200W PD1+PD2+PD3+PD4: Output:60W+65W+35W+35W Total:200W
	USB C PORT 2	PD: 5V3A,9V3A,12V3A, 15V3A, 20V5A(PPS:3.3-20V 5A)	100W	
	USB C PORT 3	PD: 5V3A,9V3A,12V3A, 15V3A, 20V5A(PPS:3.3-20V 5A)	100W	
	USB C PORT 4	PD: 5V3A,9V3A,12V3A, 15V3A, 20V5A(PPS:3.3-20V 5A)	100W	
MODEL	USB PORT	OUTPUT	Single Port POWER	TOTAL POWER
MU4165D-GaN 4C	USB C PORT 1	PD: 5V3A,9V3A,12V3A, 15V3A, 20V5A(PPS:3.3-20V 5A)	100W	PD1+PD2/PD3/PD4: Output: 100W+60W Total: 165W PD1+PD2+PD3+PD4: Output:60W+45W+30W+30W Total:165W
	USB C PORT 2	PD: 5V3A,9V3A,12V3A, 15V3A, 20V5A(PPS:3.3-20V 5A)	100W	
	USB C PORT 3	PD: 5V3A,9V3A,12V3A, 15V3A, 20V5A(PPS:3.3-20V 5A)	100W	
	USB C PORT 4	PD: 5V3A,9V3A,12V3A, 15V3A, 20V5A(PPS:3.3-20V 5A)	100W	

Mechanical Diagram:

